

Your sensible choice


M915i 1995

PCI Bus, VL Bus, ISA Bus MAINBOARD

■ CPU FAN Power Connector

■ Level 2 external cache 256KB/512KB /1MB options

■ DRAM Auto-detection and banking

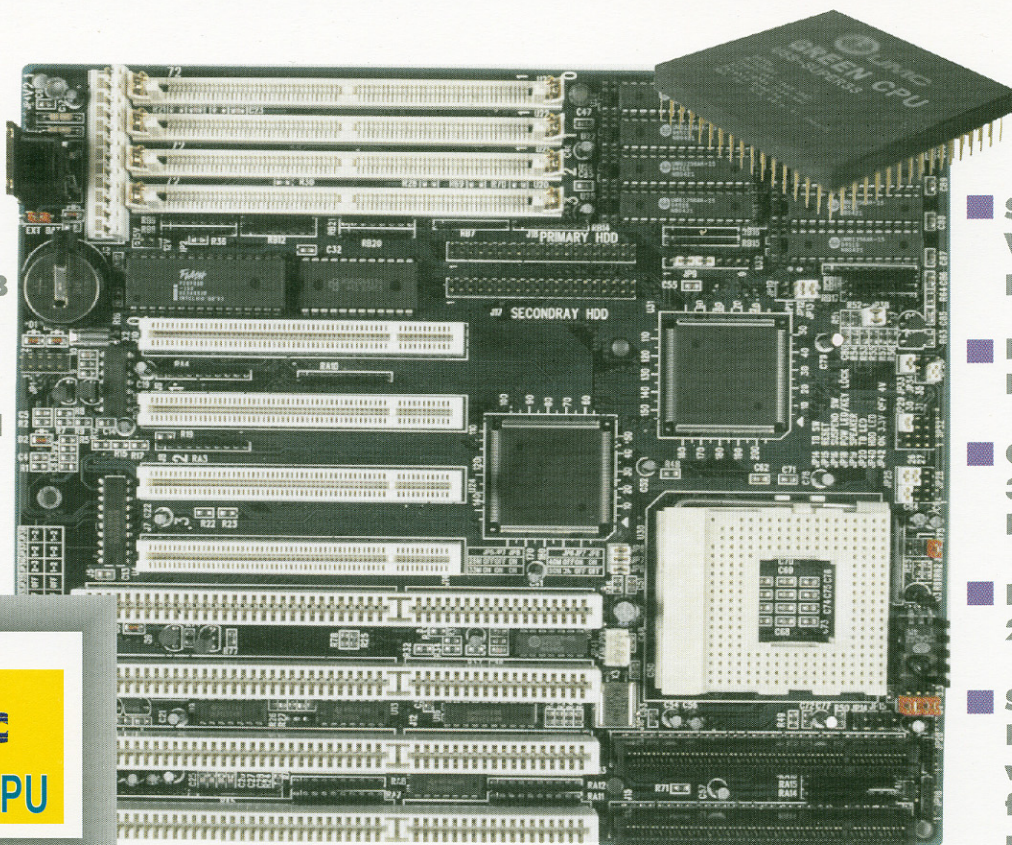

■ Supports 3.3/4.0 Volts for low power CPU

■ Provides Flash ROM support

■ On board CR2032 3.0 volt LITHIUM Battery

■ PCB size: 22cm x 26cm

■ Support Intel P24D/P24T L1 write back cache for high performance

■ Support PENTIUM™ OVERDRIVER(P24T)

We Recommend



Support 80486 processor running at 25 to 100 MHz

- INTEL 80486DX4//DX2/DX/SX
- AMD 80486DX4/DX2/DX
- Cyrix 80486DX2/DX/SX
- UMC U5S-SUPPER 25/33

4 PCI Local Bus Slots support master mode

4 x 16Bit ISA Bus Slots

2 VESA Master Slots

2 PCI IDE interface on board

Use 72-pin SIMM modules x 4 in multiple configuration up to 256MB